

Polyfibril

Increased Durability and Service Life for Concrete & Refractory Applications

Polyfibril synthetic fibers are used in any concrete application to provide plastic shrinkage and plastic settlement crack reduction, thereby enabling concrete more durable and more resilience over the entire span of service life. Moreover, its special fibrillated web structure provides additional toughness to concrete for light load applications. It is easy to use and can be directly mixed into concrete, eliminating the time and effort needed to transport and install traditional mesh for the purposes of shrinkage/temperature crack control. Polyfibril fibers reduce freeze/thaw damage and mitigate permeability of water and chemicals into concrete due to three-dimensional effect of the fibers within the concrete mix.

Applications

- Refractory Applications
- Industrial Floors, slabs on grade
- Footings, Foundations
- Walkways
- Residential Driveways
- Architectural Paving
- Overlays, Toppings
- Screed Concrete
- Stucco
- Repair Mortars
- Plaster Applications
- Construction Chemicals
- Shotcrete
- Tunnel Linings
- Precast Applications
- Extruded Curbs and Gutters

Usage Instructions and Mixing

Depending on the project requirements, Polyfibril recommended dosages vary between 0.3 kg/m³ and 2 kg/m³. Homogeneous mixture is obtained by addition of Polyfibril to the aggregate band at the concrete batching plant or by mixing in a high speed concrete mixer for at least 5 minutes in the field. It is recommended to use plasticizer additives at high fiber dosages.

Packaging Types

- 5 kg PE or 300-450-600-900 gr degradable packaging
- Custom packaging alternatives by application requirements

Product Types

Refractory Applications

Polyfibril 6


Concrete Applications

Polyfibril 12

Polyfibril 18

- Other lengths are available upon request.

Full Solution

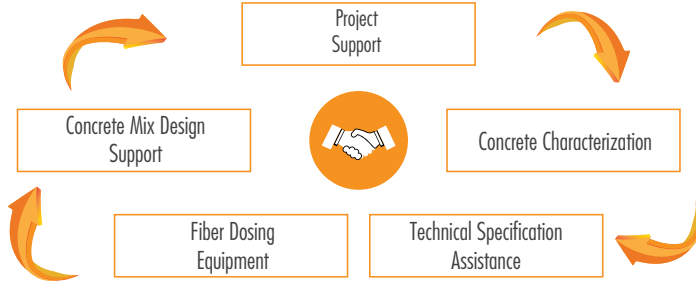

Storage & Disposal

- It is recommended to store fibers within original packages, between +5°C and 30°C, protected from moisture and direct sunlight.
- Should not be stored near flammable or oxidizing materials.
- Should not be stacked unless proper precautions are taken.
- It is the responsibility of the end user to dispose the product and the package.

Typical Properties- Polyfibril

Composition	100% virgin polypropylene
Type	Fibril synthetic fiber
Impurity	Contain No Reprocessed Olefin or No Polyamide or No Recycled Materials
Cross Section	Fibrillated web
Standards & Certifications	EN 14889 Part II Type 1B, ASTM C1116 Type III, ASTM D7508
Elastic Modulus	5.8 GPa
Tensile Strength	300 MPa
Specific Weight	0.91 gr / cm ³
Color	Transparent
Corrosion	Non-corrosive
Water Absorption	N/A
Chemical Resistance	Excellent alkali resistance
Acid effects	Stable
UV stabilize	Optimal
Cement Compatibility	Excellent
Magnetism	Non-magnetic
Melting Point	165°C
Ignition Point	> 360°C



LEGAL DISCLAMIER

The information in this technical document is based on our scientific and practical knowledge. **Polipropilen Elyaf San. ve Dış Tic. A.Ş.** is responsible solely for the quality of the product. **Polipropilen Elyaf San. ve Dış Tic. A.Ş.** cannot be held liable for any consequences resulting from the use of the product beyond the written recommendations for its application or from any misuse. This technical document is valid until a new edition is issued, at which point previous versions become invalid.

Polipropilen Elyaf San. ve Dış Tic. A.Ş.

Corporate Office: Cumhuriyet Mah. Yüzyıl Cad. No: 64 Kartal - İstanbul

Factory: Bilecik Kayı Osb Mahallesi 18. Cadde İdari Bina No: 7 İç Kapı No :1 Merkez / Bilecik

Tel: +90 216 452 90 16 - info@polyfibers.com

www.polyfibers.com